

2PD0530S




Specifications:

Parameter	Limits
Frequency (GHz)	0.5 to 3.0
VSWR(IN / OUT max : 1)	1.5
*Insertion loss (dB max)	0.7
Isolation (dB min)	15
AMP_bal (dB max)	±0.3
Phase_bal (degrees max)	±5
**Average Power (watt)	10

*Power divider insertion loss is defined as the log of the input power divided by the sum of the power at the two output ports.

** Average Power Rating into a load VSWR 1.2 to 1

Outline Drawing

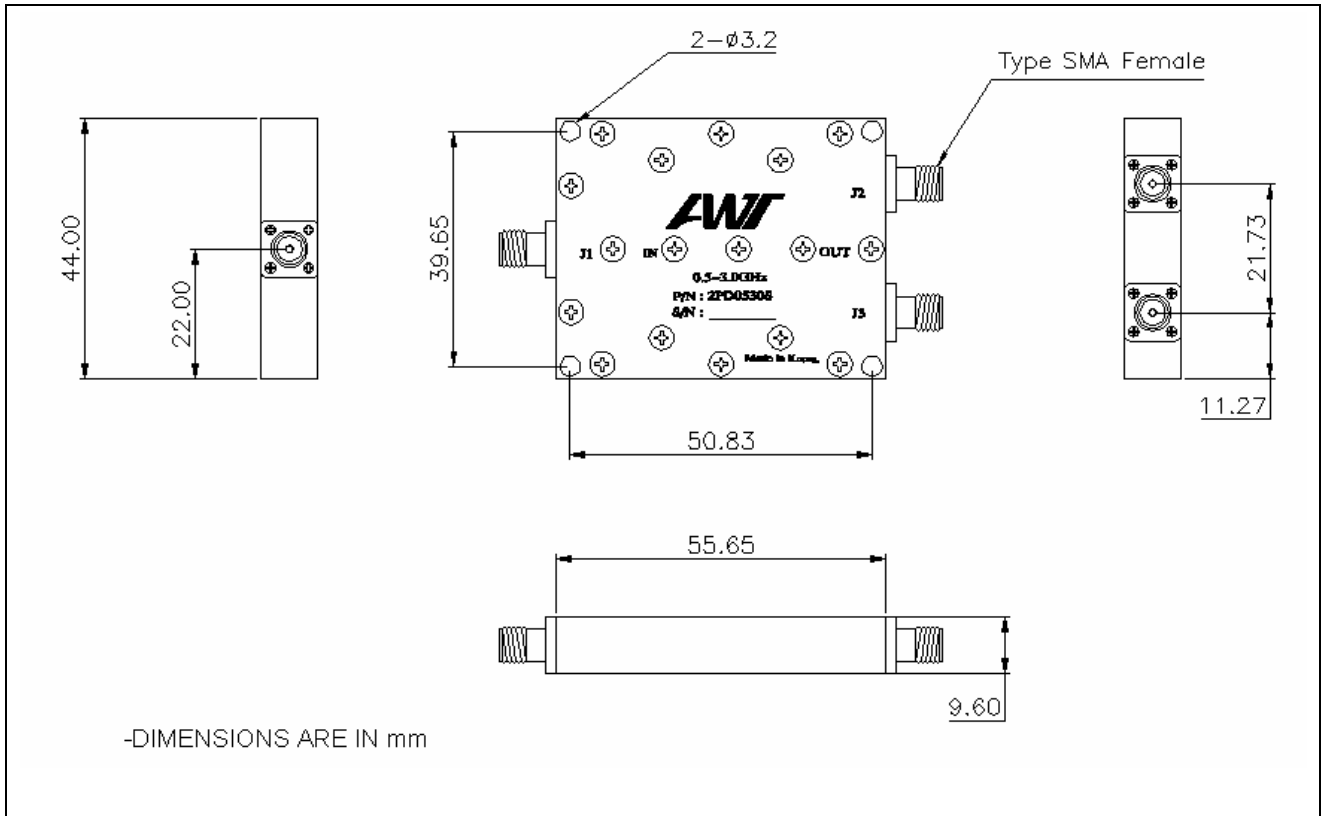

Typical Performance

